


DP210

500 MHz
2GS/s



acqiris

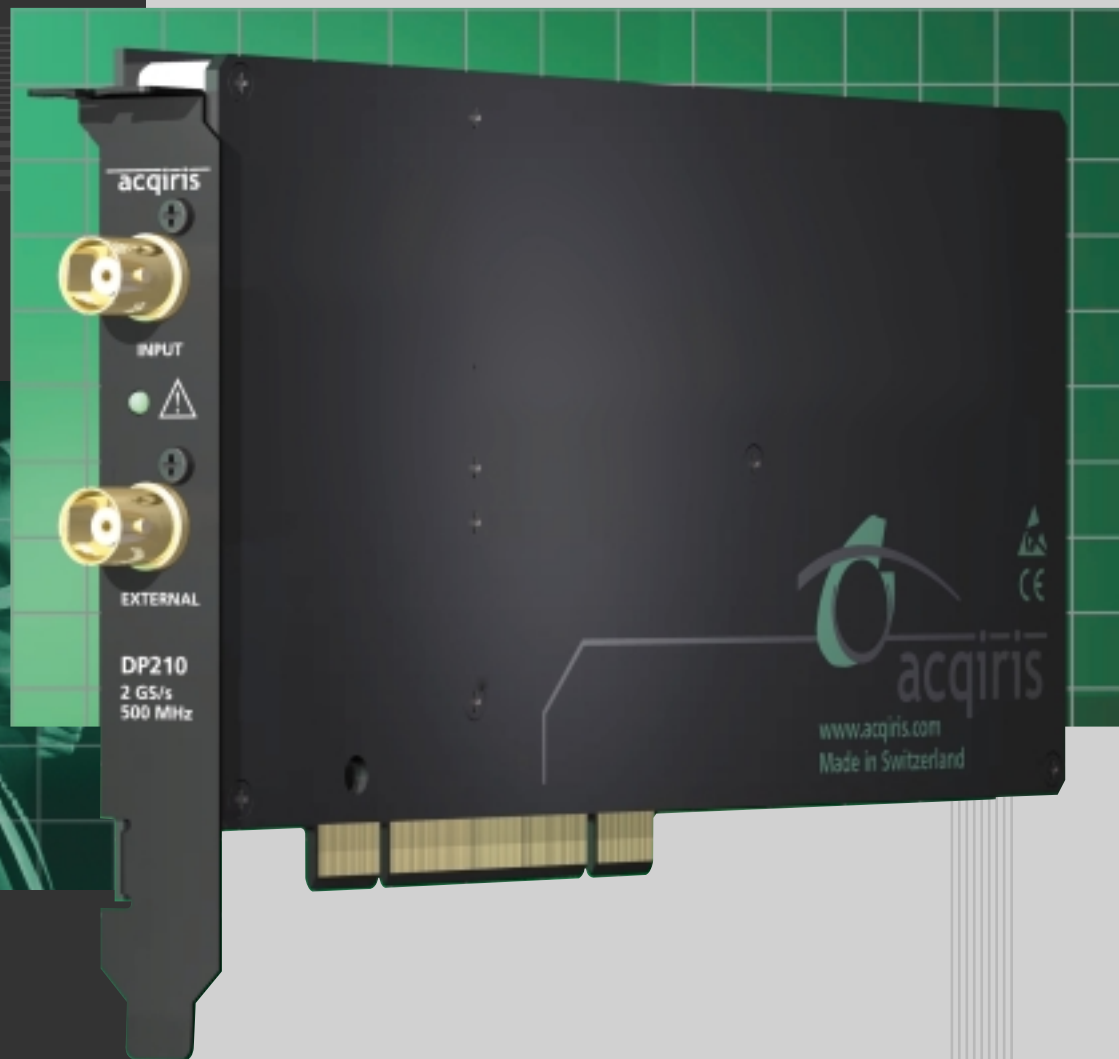

PCI Digitizer Card
with Oscilloscope
Characteristics

Main Features

- 2 GS/s Sampling Rate
- 500 MHz Bandwidth
- 256 kpoints Acquisition Memory (4 Mpoints optional)
- Full Front-end Amplification with Internal Calibration
- 50 Ω and 1 M Ω Input Impedance
- < ± 1 % DC Accuracy for Precise Voltage Measurement
- Mezzanine Front-end with Input Protection
- Complete Pre and Post Triggering
- ± 2 ppm Clock Accuracy
- Built-In 5 ps Trigger Time Interpolator (TTI) for Accurate Timing Measurements
- Low dead-time (< 500 ns) Sequential Recording with Time Stamps
- PCI® Standard
- Low Power (< 25 W)
- Drivers for Windows 95/98/NT4 and VxWorks
- AcqirisLive Software for Windows Complete with Source Code Examples
- "Plug & Play" Installation
- National Instruments LabVIEW and LabWindows/CVI Drivers
- Very high Data Transfer Rate to host PC

High Frequency Waveform Recording

Supreme PCI Performance - The Model DP210 Digitizer delivers the highest performance for any PCI data acquisition card. The digitizer features the fastest single shot sampling rate (up to 2 GS/s), widest bandwidth (500 MHz) and long 256 kpoints acquisition memory (optional to 4 Mpoints). The ultrafast sampling rate and wide bandwidth combine to allow the accurate capture of signals up to 500 MHz in frequency. While the long acquisition memory enables the DP210 to record complex signals over long periods of time.

Long memories are essential for maintaining fast sampling rates and therefore timing resolution. For example, a Model DP210 with 4 Mpoints of memory can record a signal over a 2 ms period with a sampling rate of 2 GS/s (0.5 ns per point). The fast sampling rate ensures all high frequency signal components, up to the full bandwidth of the digitizer, are accurately recorded. If the memory was reduced to 20 kpoints the sampling rate would have to fall to just 10 MS/s (20,000 points / 2 ms). Frequencies above 5 MHz would then be incorrectly digitized and important events may be missed completely. The Model DP210 delivers true high-speed performance without having to compromise on acquisition memory and measurement precision.

PC Control and Convenience - Using a DP210 Digitizer is just like driving a familiar digital oscilloscope. Windows based software allows adjustment of the key acquisition settings such as time-base, trigger and sensitivity while state-of-the-art front-end electronics enables high fidelity recording with full control over features such as input impedance, coupling, gain and offset. Data recorded by the DP210 can be transferred directly to a host PC at rates up to 100 Mbytes/s. Combining the fast transfer rates with today's most powerful PC processors makes it possible to perform measurements and calculations hundreds of times faster than with conventional instruments.

You can also store hundreds of waveforms directly on the PC's hard disc or make hard copies instantly on your printer. Archiving important waveforms has never been easier. Furthermore, you can interface directly to your desktop PC and use the Internet (or a local network) to send important information to others anywhere and at anytime. The result is flexibility and performance that can dramatically reduce testing times, increase measurement throughput and lower overall cost. For high-frequency applications (up to 500 MHz) in Telecommunications, Magnetic Media, Time of Flight Mass Spectroscopy, Computing, Particle Physics, the DP210 is the digitizer of choice.

Scope Like Characteristics: Amplifier, Trigger and Time Base


Mezzanine Front-end - The signal input of the DP210 Digitizer has programmable front-end electronics that provides a complete set of input voltage ranges (from 50 mV to 5 V full scale in a 1, 2, 5 sequence) and variable voltage offset. The inputs have selectable impedance (50 Ω or 1 M Ω) and are fully protected against over-voltage signals. The amplifiers feature internal calibration (no need to disconnect input signals) and very fast recovery from out-of-range signals. The input buffer is mounted on a removable mezzanine card so, in the event of accidental damage or as components fatigue over time (e.g. relays in high duty cycle automated testing applications), replacement is fast and efficient.

Flexible Trigger - The digitizers include a precision trigger system with full pre and post trigger adjustment. User selectable coupling is combined with internal or external trigger sources for maximum flexibility. The digitizers also provide a sophisticated sequential trigger mode with less than 500 ns dead time between successive triggers.

This extremely low dead time enables events, which may occur at very high repetition rates, to be captured and stored in their correct arrival sequence. This trigger mode is perfect for "impulse-response" type applications (RADAR, SONAR, LIDAR, Ultrasonic, Medical & Biomedical research, etc.). The sequential trigger mode and very low dead time greatly extend the digitizers timing range and resolution. Each event can be individually time stamped and relative time measurements (between events) can be made with less than 1 ns resolution.

Precision Time Base - Each digitizer also has its own crystal-controlled precision time base and sample rates can be selected, in a 1, 2, 2.5, 4, 5 sequence, from 100 S/s to 2 GS/s. An internal Time-to-Digital Converter (TDC) with high timing resolution is used to assist with timing calibration and trigger positioning. The TDC permits accurate positioning of the trigger

signal with regards to the internal clock (sampling time). The sample rate can also be generated externally; using the external input connector, for applications where the sample rate must be synchronized with the signal to be acquired

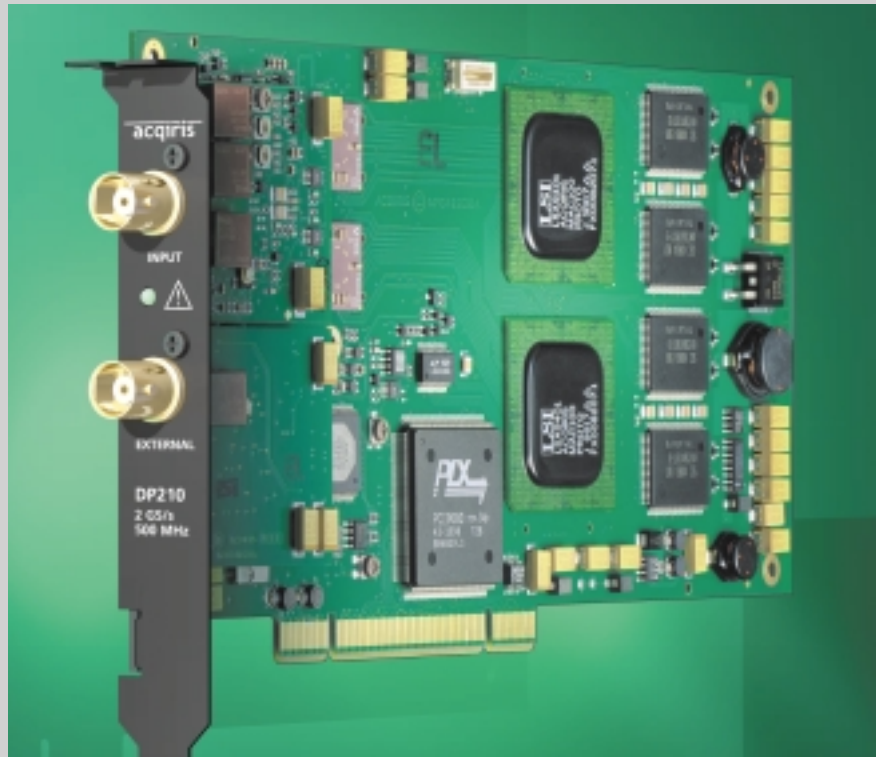


The DP210 Digitizer use large-scale integrated circuit technology to reduce size and power requirements. This essential technology allows the DP210 to deliver the fastest sampling rate, highest bandwidth and deepest memory for any digitizer in the standard PCI package.


High Fidelity Measurements

Quality Acquisitions - Acqiris digitizers are designed to provide superior measurement precision and accuracy. Key acquisition specifications (such as DC accuracy, Integral and differential linearity) are optimized to deliver maximum measurement fidelity. Careful circuit layout, custom IC's and special packaging techniques are all used to reduce overall system noise.


The low noise and low harmonic distortion are best demonstrated by the following Fourier Transform performed on an acquired signal. Other important qualities of the digitizer are demonstrated by its step response, frequency response and high effective bit score. The following figures depict typical measurements.

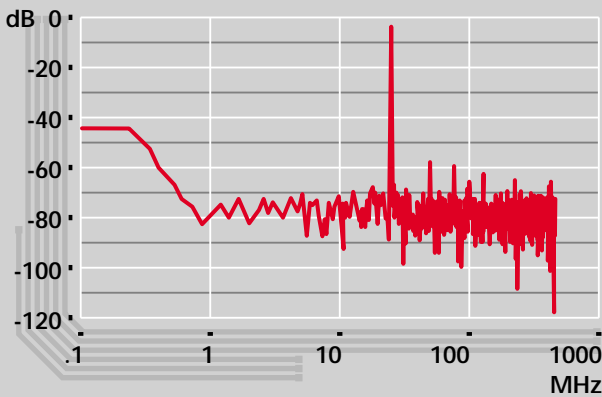


FFT analysis of a pure 25MHz sinewave, measured at 500 mV full scale, shows very low noise floor and little harmonic distortion

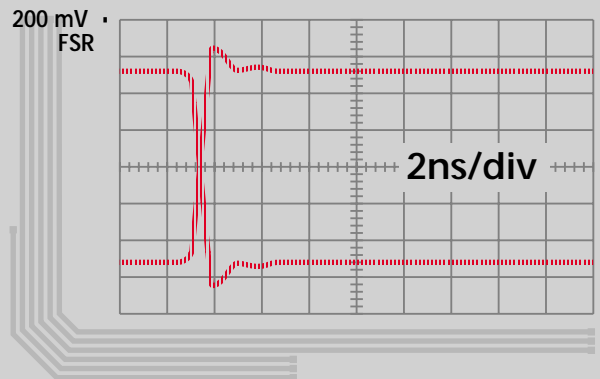

Positive and negative step responses show minimal overshoot and undershoot

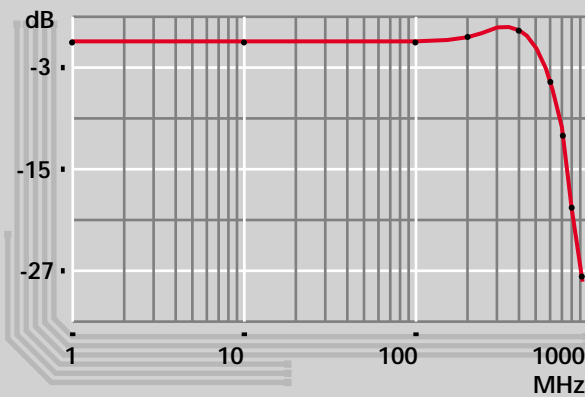

Frequency response is flat and system bandwidth reaches beyond the specified 500 MHz

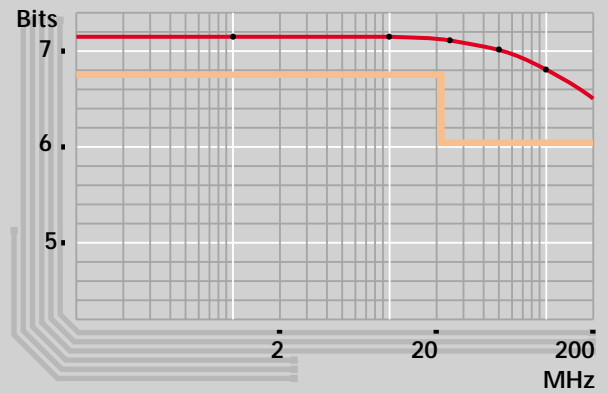

Effective bits (top graph) are significantly higher than the minimum guaranteed performance (bottom graph)

High Reliability and Low Power Design

Low Parts Count - A very high degree of integration is needed in order to achieve the level of performance obtained with the Model DP210 digitizer. By drastically reducing the number of components the integration has clear benefits on reliability and lowers total power consumption. To maintain quality

measurements the DP210 also uses a proprietary-cooling scheme. This cooling method allows components to run at safe and stable operating temperatures. It helps to extend component life as well as minimizing measurement errors caused by temperature variation.

Ease of Installation, Ease of Use and AcqirisLive

Ease of use - Installing and operating your data acquisition system is easy thanks to "Plug&Play" modularity and Windows based installation software (on CD). Just insert the CD in your PC's drive, run the installation program, and power down and install the digitizers. Installation problems are quickly resolved using Acqiris' diagnostic tool-set and on-line help. Run AcqirisLive, a complimentary digitizer control and waveform display software package, and start making acquisitions immediately. Now you can leverage the power of your PC to perform rapid data analysis without paying the overhead costs associated with GPIB based stand-alone test instruments.



The installation and operation of the Model DP210 is supported by the following software components:

- An automatic installation program (on CD) for the software components listed below
- Plug&Play drivers for Windows 95/98, capable of managing several digitizers simultaneously. The

drivers work with Visual C++ as well as Visual BASIC.

- Drivers for National Instruments' LabView and LabWindows/CVI environments.
- AcqirisLive, which permits the interactive operation of the digitizers 'right-out-of-the-box'. Data files can be stored in ASCII format for convenient use in spreadsheet programs such as Excel.

Getting Started - Acqiris also supplies simple application examples in source code as a starting-point for application-specific developments in C/C++ or Visual BASIC, as well as with test environment such as LabWindows/CVI and LabView. The software drivers make system integration fast and affordable. Acqiris data acquisition systems are ideal in applications (laboratory or production) where low cost and high-speed measurements are required.

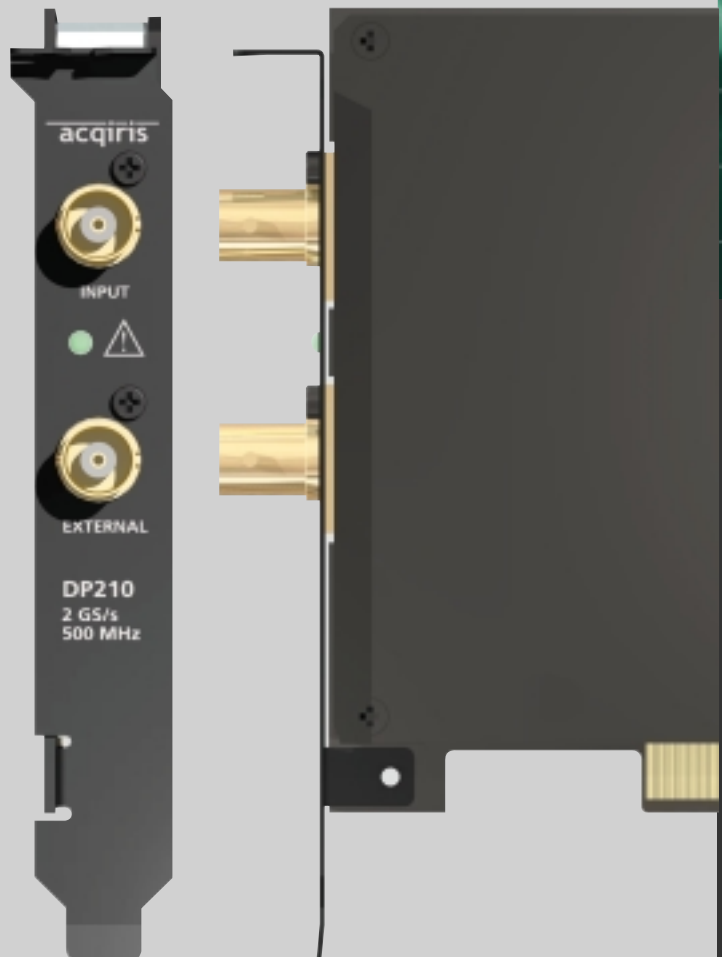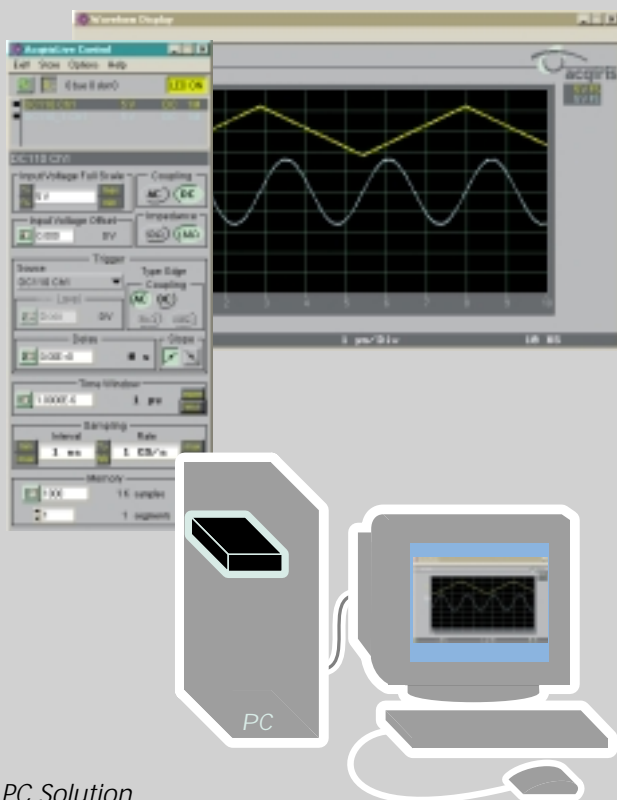

PC Solution

DP210 Waveform Digitizer

500 MHz, 8 bit, 2 GS/s, 256 kpoints or 4 Mpoints, Single Channel

Signal Input

Bandwidth (-3 dB)

DC to 500 MHz in 50 Ω
DC to 400 MHz in 1 M Ω

Full Scale Range (FSR)

50 mV, 100 mV, 200 mV,
500 mV, 1 V, 2 V and 5 V

Impedance

1 M Ω //10 pF, 50 Ω \pm 0.5%

Connector

Gold plated BNC's

Offset

\pm 2 V below 500 mV FSR
and \pm 20 V above

Channel

One

Coupling

AC, DC

Maximum Input Voltage

100 V (DC+ peak AC < 10 kHz)
at 1 M Ω
 \pm 5 V DC (500 mW) or 5 V RMS
at 50 Ω

Digital Conversion

Conversion Rate

100 S/s to 2 GS/s
in 1, 2, 2.5, 4, 5 sequence

Resolution

8 bits (1:256)

Aperture Uncertainty

\pm 1 ps

Differential Linearity

\pm 0.7 LSB

Acquisition Memories

256 kpoints and 4 Mpoints
(optional)

Time Base

Range

Up to 128 μ s at 2 GS/s,
(2 ms opt.)
Up to 2560 s at 100 S/s,
(40 ks opt.)

Clock Accuracy

Better than \pm 2 ppm

Trigger Time Interpolator

5 ps resolution

Acquisition Modes

Single shot,
Sequence: 1 to 200 segments
(8000 optional)
Dead Time: < 500 ns

Trigger (Internal + External)

Slope

Positive and Negative

Coupling

AC LFRreject and DC

Pre-Trigger

Adjustable to 100% of full scale

Post-Trigger

Adjustable up to 200 Mpoints

Trigger Sensitivity

From DC to 500 MHz:
Triggers on signals
> 15% FSR of channel setting
> 500 mV in external

External Input for Trigger, Clock & Reference

Bandwidth

DC to 500 MHz (-3 dB)

Maximum Input Voltage

\pm 5 V DC (500 mW)

Impedance

1 M Ω or 50 Ω

External Trigger Threshold

Variable between -3 V and +3 V

Connector

Gold plated BNC

External Reference Frequency

10 MHz

External Clock/Ref Threshold

Variable between -3 V and +3 V

Minimum Clock/Ref Amplitude

500 mV pkpk

External Clock Frequency

10 MHz to 500 MHz (clock)

System Performance

DC Accuracy

±2% FS
< ±1% FSR typical

Integral Linearity

< ±1% FSR

Effective Bits (at 2GS/s)

DC-20 MHz: > 6.5
20-200 MHz: > 6.0

PC System Requirements

Processor

150 MHz Pentium (or higher)

Operating system

Windows 95/98/NT4
and VxWorks

Memory

32 Mbyte RAM (more is
recommended when working
with several cards with 4 Mpoint
acquisition memories)

Hard Drive Space

20 Mbyte Minimum

Display Resolution

At least 800 x 600
(for use of AcqirisLive)

CD Drive

General

Power

< 25 W

Current Requirements

+12 V 0.9 A
+5 V 2 A (3 A with M4M)
-12 V 30 mA

Warranty

3 years

High-speed PCI bus transfers data at rates up to 100 Mbytes/s peak to local processor

Front Panel led indicates digitizer status

green: ready for trigger yellow: module identification red: triggered

Environmental and Physical

Operating Temperature

0° to 50°C

Required Airflow

> 7 l/s (2 m/s)

Relative Humidity*

5 to 95% (non-condensing)

Shock*

30 G, half-sine pulse

Vibration*

5-500 Hz, random

EMC Immunity


Complies with EN50082-1

EMC Emissions

Complies with EN50081-1,
EN55022 Class B for radiated
emissions

Dimensions

PCI standard

Certification and Compliance 

* As defined by MIL-T-28800E Class 3

Ordering Information

Model Number	Description
DP210	Single Channel, 500 MHz, 2 GS/s, 256 kpoints PCI digitizer card
DP210-M4M	4 Mpoints acquisition memory option
DP210-W5	5 years repair warranty
DP210-CAL	Calibration certificate
P001	300 MHz 10:1 10 M Ω passive probe

DP210

Acqiris USA

234 Cromwell Hill Rd
P.O. Box 2203
Monroe,
NY 10950-1430
Tel: 914 782 6544
Fax: 914 782 4745

Acqiris Europe

18, chemin des Aulx
1228 Plan-les-Ouates
Geneva
Switzerland
Tel: +41 22 884 3390
Fax: +41 22 884 3399

Acqiris Asia-Pacific

Suite 7, 28 Blackburn Road
P.O. Box 317
Blackburn 3130
Australia
Tel: +61 3 9877 9322
Fax: +61 3 9849 0861

For other sales and service representatives
around the world, see our web site at:
www.acqiris.com