


Acqiris SA230P

14-bit ADC Card, 4 GS/s, 1 channel
with FPGA signal processing



DATASHEET

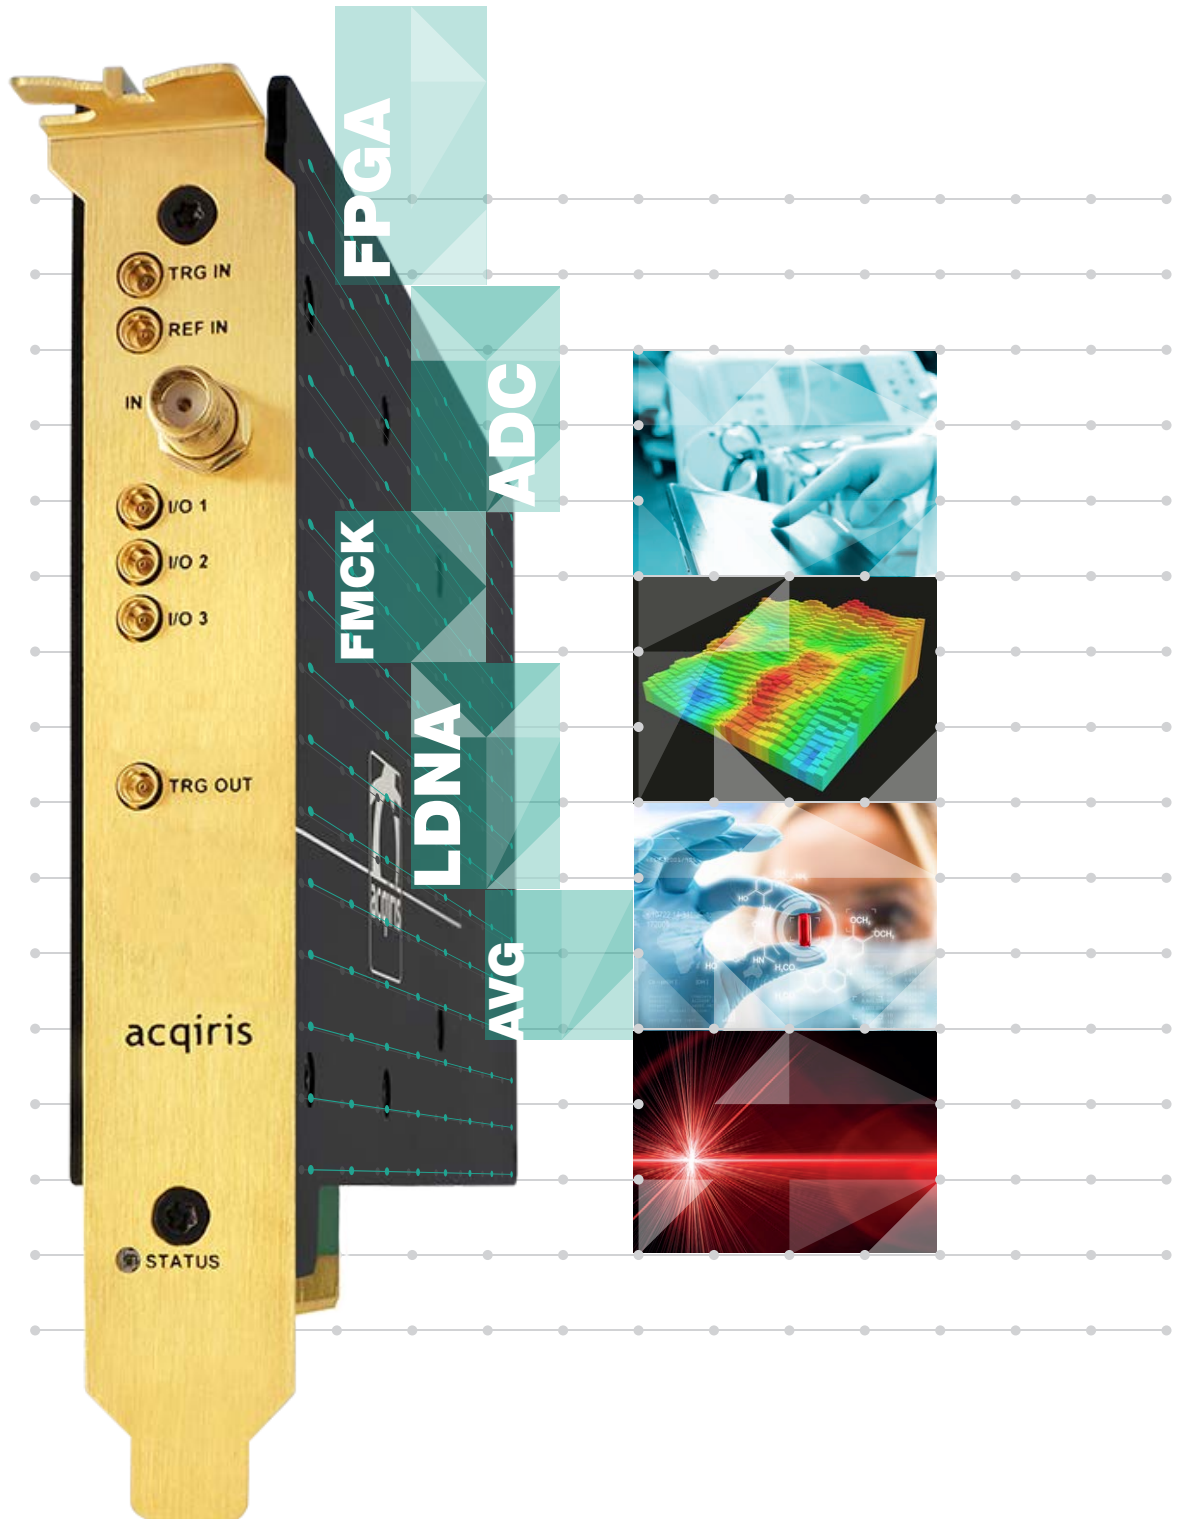

See deeper and sharper than before

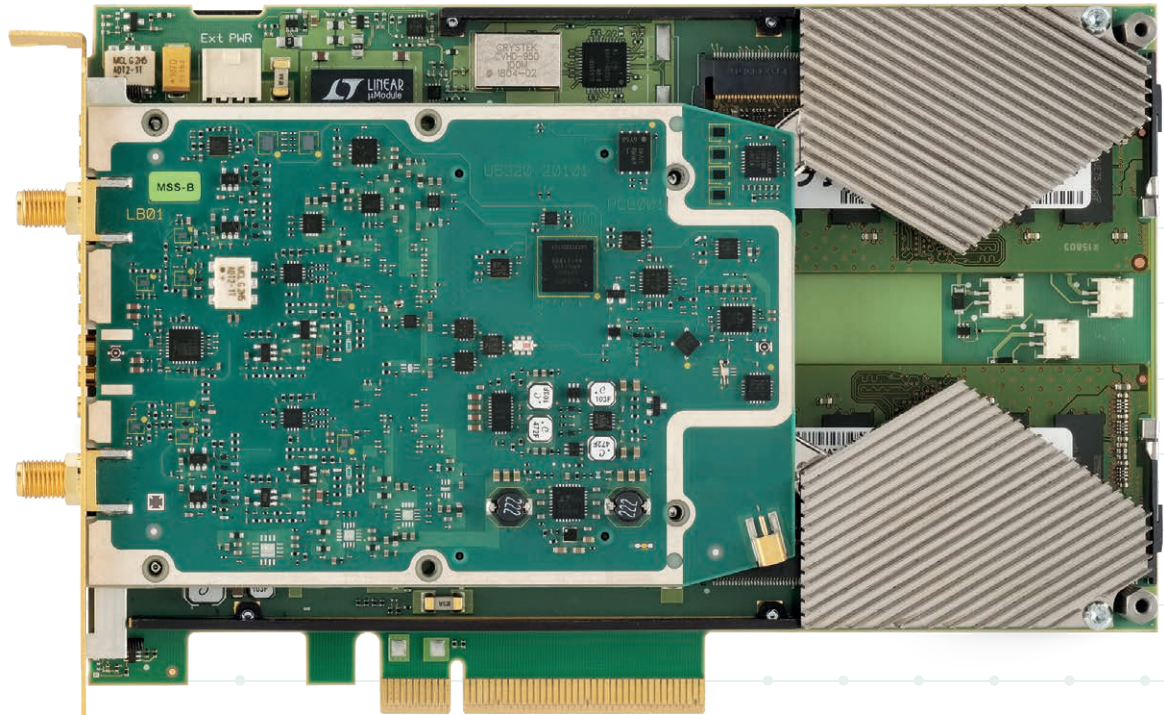


Figure 1. SA2 ADC card - Open view.

New generation of Signal Acquisition cards

The SA2 is Acqiris's high-performance 14-bit ADC card platform, performing fast signal acquisitions from 1 GS/s up to 10 GS/s, with excellent signal fidelity across a wide bandwidth. This new generation focuses on addressing unique OEM application needs.

The SA230P is the 4 GS/s version of the SA2 product line. This unique DC coupled 14-bit digitizer captures waveforms from DC up to 2 GHz.

Essential features

Accurate and precise measurement

- 14-bit resolution
- 4 GS/s sampling rate on 1 channel
- DC up to 2 GHz bandwidth
- DC coupled, 50 Ω input impedance
- Two full scale range versions available:
 - Standard voltage ranges: 500 mV or 2.5 V
 - Low voltage ranges: 500 mV or 1 V
- Programmable DC offset (\pm FSR/2)

Signal fidelity

- Low noise density and low distortion
- Optimized frequency response flatness
- Excellent and flat SFDR over a large analysis bandwidth (70 dBc)
- Optimized response allows few hundred picoseconds pulse analysis
- Unique 15 ps RMS trigger time interpolator precision.

Product description

All the ADC cards from the SA2 generation implement a proprietary low noise front-end enabling undisputed spurious-free dynamic range (SFDR) and signal noise ratio (SNR) performances in high frequencies.

This makes the ADC cards ideal for OEM applications requiring digitizer sampling at wide bandwidth and very high dynamic range.

The PCIe Gen 3 interface enables high data transfer rate and streaming capabilities to the host computer at up to 6.5 GB/s.

This ADC card occupies a single PCIe slot, offering high performance in a small footprint.

For information on specific application please contact us: support@acqiris.com.

Features depending on your application (options)

Increased recording time:

- Up to 8 GB memory allowing for 4 GSamples
- Streaming capability up to 6.5 GB/s

Real-time processing:

- Real-time averaging
- Data compression
- Simultaneous acquisition and readout, enabling streaming with high data throughput
- Custom real time-processing



Integration in your system

Benefit from responsive signal acquisition solutions for your application.

Applications

Because each OEM project is unique, we develop data acquisition cards based on standard platform that can be fine-tuned to address your particular challenges.

We propose signal acquisition solutions easy to integrate in your system, fitting your actual requirements, and including only what you need.



The SA230P includes on-board FPGA offering real-time signal processing capability such as waveform averaging. We also propose to open the FPGA for custom real-time processing.

More than a digitizer, the ADC Card's programmable I/O signals allow for system control.

This PCIe card with advanced real-time processing capabilities is specially designed for embedded OEM applications in a variety of challenging measurements, imaging and processing systems, including:

- Analytical time-of-flight (TOF)
- Ultrasonic non-destructive testing
- Medical research and imaging instrumentation
- Environmental monitoring using laser scanning (LiDAR)
- Distributed strain and temperature sensors (DSTS)

Overall performance of the SA230P enables deeper, faster and more accurate measurement and analysis for final products.

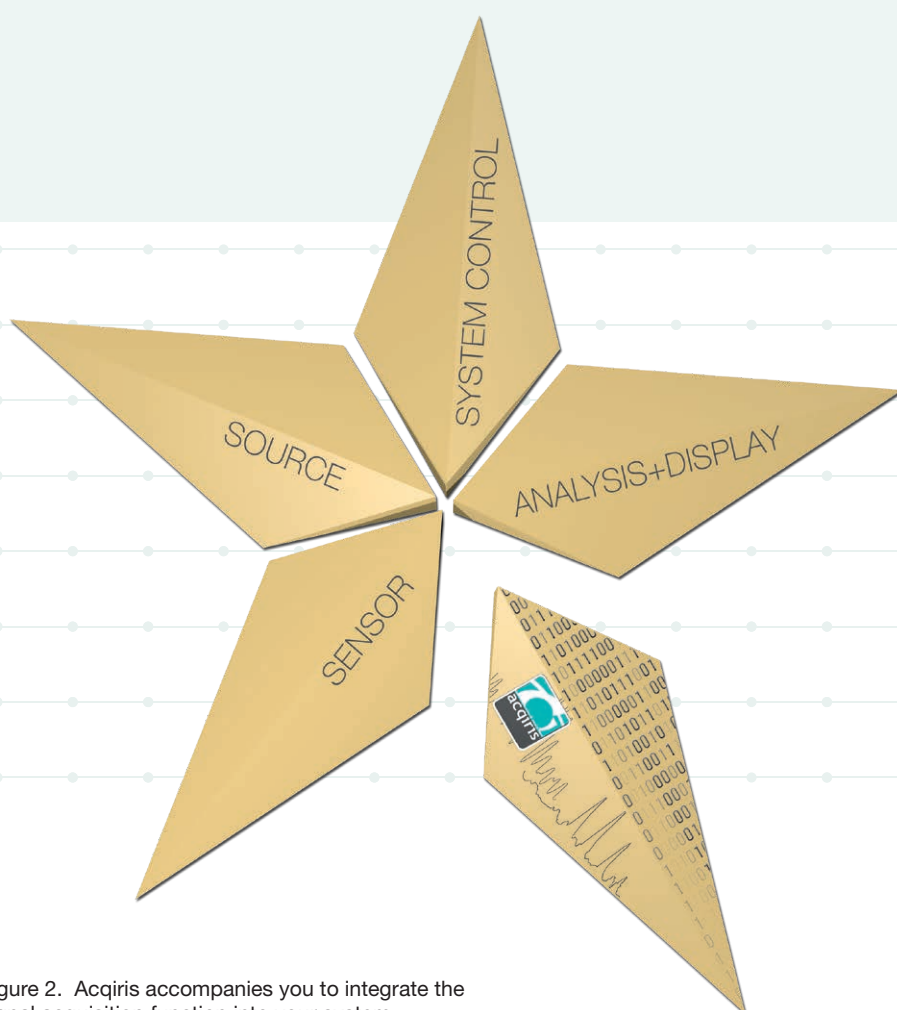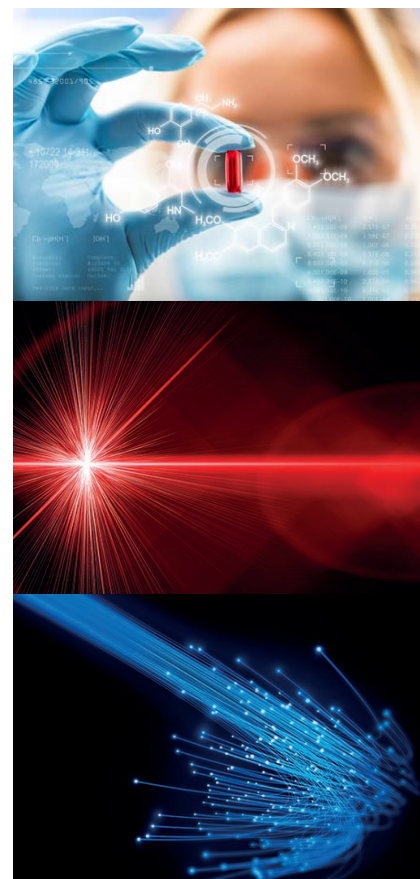

Easy software integration

The ADC cards of the SA2 family are supplied with a comprehensive portfolio of module drivers, documentation, examples, and software tools to assist you to quickly develop your system with your software platform of choice.

Additionally, our integration experts are there to help you.

Compliance

Designed to benefit from very fast data interface, the product is compliant with PCI Express 3.0 x8 standard.

Figure 2. Acqiris accompanies you to integrate the signal acquisition function into your system. Our data acquisition solutions aim at improving the overall performances of your end-product.

Hardware platform

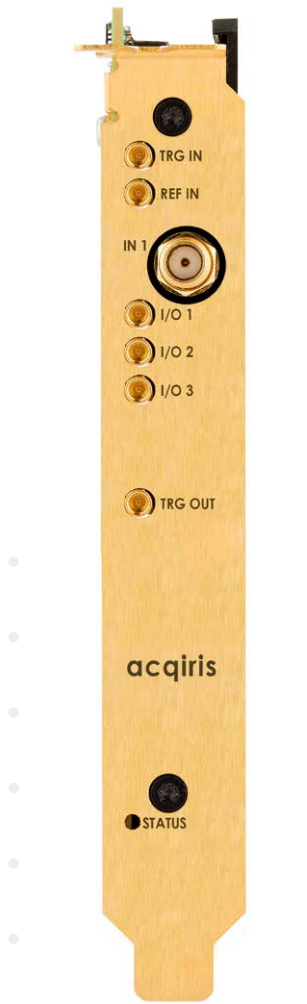


Figure 3. SA230P front panel, with analog inputs and multiple programmable I/O signals.

Integration

In a host computer or externally, the SA230P signal acquisition card occupies a single half-length PCIe x8 slot, and, additionally, a fan assembly¹ is attached to the rear for effective cooling.

On-board real-time processing

At the heart of the SA230P ADC card is a data processing unit (DPU) based on the Xilinx Kintex UltraScale FPGA.

This DPU controls the digitizer functionality by implementing digitization of the signal, data storage in the DDR4 SDRAM memory and transfer through the PCIe connection to the host computer.

Moreover, this powerful feature allows real time signal processing and data reduction to be carried out on-board, minimizing transfer volumes and speeding-up analysis.

Unique proprietary technology

Our engineering team developed exclusive proprietary integrated circuits and IPs enabling excellent signal performances.

The SA230P incorporates:

- Low noise and low distortion signal conditioning amplifier IC to drive interleaved ADCs
- Specific clock distribution, minimizing the clock jitter and spurious
- Optimized frequency response flatness enhancing measurement accuracy on a wide bandwidth.

Full scale range

The SA230P comes with two full scale range (FSR) versions:

- Standard voltage ranges: 500 mV or 2.5 V (selectable by software)
- Low voltage ranges: 500 mV or 1 V (Planned Q2'2019).

Block diagram

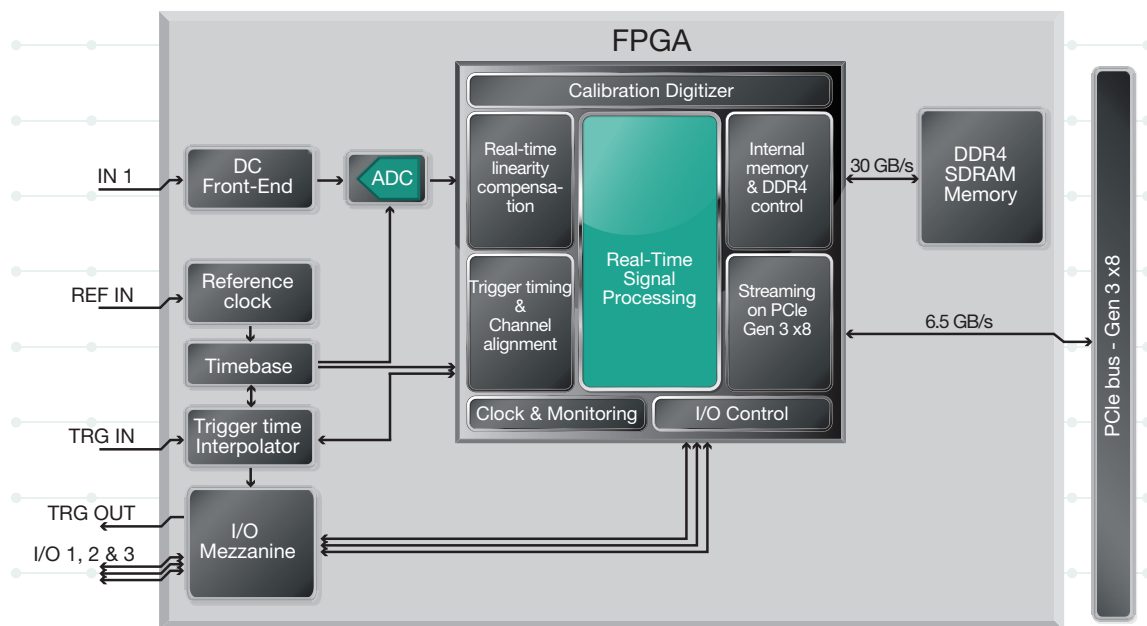


Figure 4. Top level block diagram of the SA230P PCIe ADC card, with on-board real-time processing.

1. See page 10 for full dimension with fan assembly.

Trigger

The trigger source can be a signal level acquired on the input channel (IN), or an external signal applied on TRG IN, or a software trigger.

Trigger resolution

The trigger time interpolator technology achieves a unique trigger resolution of 15 ps.

Programmable I/Os

Three programmable I/Os are available for your system control and optimization.



Software platform

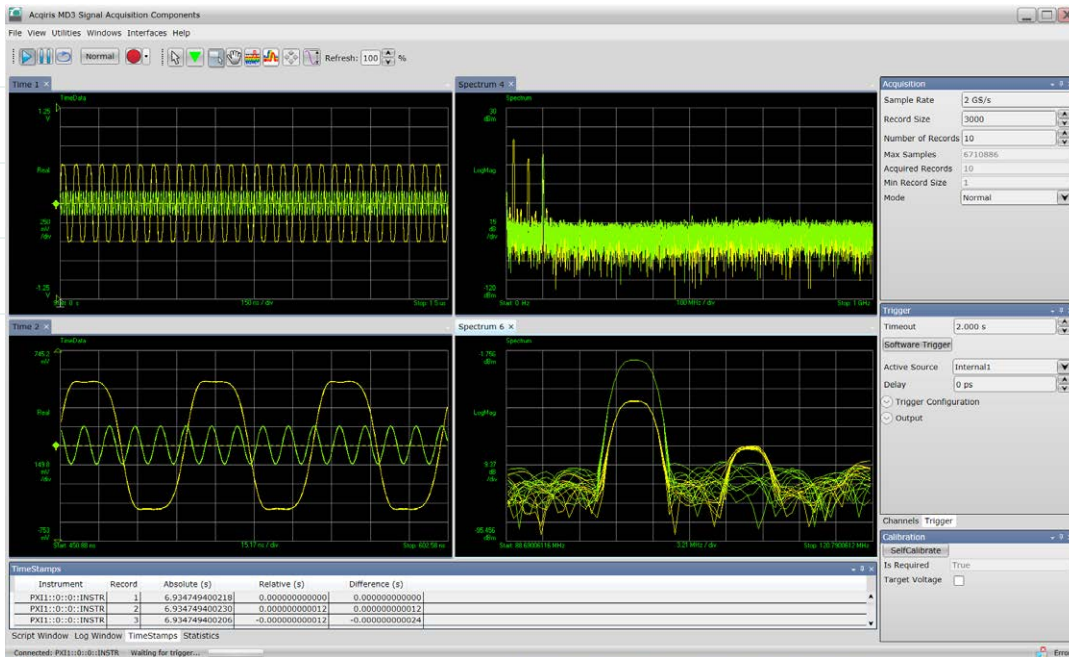


Figure 5. The software front panel (SFP) interface can display acquired data in time domain, frequency domain and provide additional useful information, such as the list of trigger time-stamps.

Drivers

The module comes with Windows or Linux drivers that work in the most popular development environments, to make easier the integration in your system.

Software information

| | |
|--|---|
| Supported operating systems and host computers | See system requirements on page 10. |
| Standard compliant drivers | Standard compliant drivers IVI-C, IVI.NET |
| Supported application development environments (ADE) | VisualStudio (VB.NET, C#, C/C++) |

Software applications

In addition, all the SA2 family cards include the soft front panel (SFP) graphical user interface.

This software application can be used to initially explore the ADC card main capabilities and as a debugging tool during the development phase.

It serves as a friendly and convenient tool for capturing and displaying the acquired data in time or frequency domain.

For further integration in your application, our experts can help by providing code snippet.

Application options



Figure 6. The SA230P is a fully shielded PCIe Card maximizing both ESD and EMI protection.

Real-time processing matching your system needs

The firmware in the ADC card's FPGA enables real-time signal processing. Each firmware can have different acquisition modes themselves having various features, including data compression or noise reduction. This results in fine-tuned FPGA firmware allowing the on-board processing to be optimized for your specific applications.

Main ADC card modes:

- Digitizer (DGT)
- Real-time averaging (AVG option)

Optional feature:

- Simultaneous acquisition and readout - Streaming records (CST option)

Digitizer mode (DGT)

The digitizer firmware allows standard data acquisition, including:

- Digitizer initialization
- Setting of the acquisition
- Management of channel triggering for best synchronization
- Distortion reduction
- Storing data in the internal memory
- Transferring data to the host computer

The multi-record functionality allows to capture successive triggered events occurring within a very short time. The very fast trigger rearm time of the SA230P is a crucial feature to achieve low dead time. To increase trigger flexibility, a pre- or post-trigger delay can also be applied to the trigger position at picoseconds resolution.

Furthermore, the binary decimation can be used to reduce the amount of data, lowering the sample rate by a factor of 2, 4, or 8 – enabling decimated sampling rates at 2 GS/s, 1 GS/s, or 500 MS/s.

Real-time averaging mode (AVG option)

Averaging signals reduces random noise effects, improving the signal-to-noise ratio as well as increasing resolution and dynamic range.

This mode enables synchronous real-time sampling and accumulation at 4 GS/s, featuring:

- Accumulation from 1 to > 65 000 triggers
- Effective acquisition length up to 1 MSamples
- Noise suppressed accumulation (NSA)
- Self-trigger mode for minimal synchronous noise
- Baseline stabilization algorithm and digital offset
- Decimation factors of 2, 4, or 8 with associated low pass filters, enabling decimated sampling rates at 2 GS/s, 1 GS/s, or 500 MS/s.

Besides, the streaming capabilities of the SA230P allows to readout previously averaged record while performing a new accumulation. The averaging firmware enables multiples and successive averaging sequences without missing any trigger.

Simultaneous acquisition and readout - Streaming records (CST option)

Combined either with the digitizer or the averager mode, this function enables continuous simultaneous acquisition and readout. Compared with standard mode, it allows longer acquisition duration, and is especially dedicated to applications requiring no trigger loss.

In a standard digitizer mode, acquisition and readout are sequential, i.e. the readout of the data is performed after the acquisition has stopped; whereas, with simultaneous acquisition and readout, the acquired records are streamed to the host computer while the next records are acquired and processed.

Firmware features

Accurate trigger timing

When using an external trigger, the digitizer accurately measures and stores the time of each trigger. This information is essential to determine the precise relation between the trigger and the signal digitized samples. The trigger time interpolator (TTI) is a high-precision integrated time-to-digital converter that guarantees trigger time-stamp measurement accuracy.

Easy mode switch

A simple call to the configuration function allows to automatically switch from the digitizer to the average mode.



Technical specifications and characteristics

Analog input (IN SMA connectors)

| | | |
|---|---|---|
| Number of channels | 1 | |
| Impedance | $50\ \Omega \pm 2\%$ (<i>typical</i>) | |
| Coupling | DC | |
| Full scale range (FSR) | default | 500 mV and 2.5 V (selectable by software) |
| | -LVR | 500 mV and 1 V (selectable by software) |
| Maximum input voltage | 500 mV FSR | $\pm 600\text{ mVpk}$ |
| | 2.5 V FSR | $\pm 3\text{ Vpk}$ |
| | 1 V FSR | $\pm 1.2\text{ Vpk}$ |
| Input voltage offset | $\pm \text{FSR}/2$ | |
| Input frequency range (-3 dB bandwidth) | DC to 2 GHz (<i>typical</i>) | |
| Bandwidth limit filters (BWL) | 20 MHz, 200 MHz, 700 MHz (<i>nominal</i>) | |
| Effective numbers of bits (ENOB) ¹ | @ 625 MHz | 8.9 (<i>nominal</i>) |
| Signal to noise distortion (SNR) | @ 625 MHz | 54 dB (<i>nominal</i>) |
| Spurious free dynamic range (SFDR) | @ 625 MHz | 70 dBc (<i>nominal</i>) |

Calibration

The SA230P is factory calibrated and shipped with a certificate of calibration.

1. Measured for a -1 dBFS input signal in internal clock mode at 2 GS/s.

| Digital conversion | | |
|--|--------------|---|
| Resolution | | 14 bits |
| Acquisition memory | -MEA -MEB | 4 GB (1 GSamples) <i>(default)</i> 8 GB (2 GSamples) <i>(optional)</i> |
| Sample clock source | | Internal |
| Internal clock source | | Internal, external reference |
| Real-time sampling rate | | 4 GS/s |
| Clock jitter ¹ | | 100 fs <i>(nominal)</i> |
| Clock accuracy | | ± 1 ppm <i>(nominal)</i> |
| External reference clock (REF IN MMCX connector) | | |
| Impedance | | 50 Ω <i>(nominal)</i> |
| Frequency range | | 10 MHz ± 1 kHz 100 MHz ± 1 kHz |
| Signal level | | -3 dBm to +3 dBm <i>(nominal)</i> |
| Coupling | | AC |
| Acquisition modes | | Single record, Multi-record, Streaming |
| Trigger | | |
| Trigger mode | | Positive or negative edge |
| Trigger source | | External, Channel, Software |
| Channel trigger frequency range | | DC to 2.5 GHz <i>(nominal)</i> |
| Trigger time interpolator resolution | | 6 ps <i>(nominal)</i> |
| Trigger time interpolator precision | | 15 ps RMS <i>(nominal)</i> |
| Rearm time (deadtime) | | < 0.5 μ s <i>(nominal)</i> |
| External trigger (TRG IN - MMCX connector) | | |
| Coupling | | DC |
| Impedance | | 50 Ω |
| Level range | | ± 5 V |
| Minimum amplitude | | 0.5 V pk-pk |
| Frequency range | | DC to 3 GHz |
| Trigger out (TRG OUT - MMCX connector) | | 1 (programmable), 50 Ω source, LVCMOS 3.3 V |

1. Jitter figure based on phase noise integration from 100 Hz to 100 MHz in internal reference.



Technical specifications and characteristics

Programmable IO (I/O 1, 2 and 3 MMCX connectors)

| | | |
|--------------------|------|---|
| Output functions | | Acquisition active |
| | | Trigger is armed |
| | | Trigger accept resynchronization |
| | | Reference clock out |
| | -AVG | Self-trigger |
| | -AVG | Accumulation active |
| Output level range | | DC coupling, 50 Ω source, LVCMOS 3.3 V |
| Input function | -AVG | Accumulation enable |
| Input level range | | DC coupling, LVCMOS 3.3 V, max. voltage +5 V |

Definitions for specifications

Specifications describe the warranted performance of calibrated cards that have been stored for a minimum of 2 hours within the operating temperature range of 0 to 50 °C, unless otherwise stated, and after a 45-minute warm-up period. Data represented in this document are specifications unless otherwise noted.

Characteristics describe product performance that is useful in the application of the product, but that is not covered by the product warranty. Characteristics are often referred to as Typical or Nominal values.

- Typical describes usual performance, which 80 % of cards will meet when operated over a 20 to 30 °C temperature range. Typical performance is not warranted.
- Nominal describes representative performance that is useful in the application of the product when operated over a 20 to 30 °C temperature range. Nominal performance is not warranted.

System requirements¹

| Topic | Windows | Linux |
|----------------------|---|---|
| Operating systems | Windows 10 (32-bit and 64-bit), All versions Windows 7 (32-bit and 64-bit), All versions | Linux Kernel 2.6 or higher (32 or 64-bit), Debian 9, Ubuntu-16.04, Ubuntu-18.04, CentOS-7 |
| Processor speed | 1 GHz 32-bit (x86), 1 GHz 64-bit (x64), no support for Itanium 64 | As per the minimum requirements of the chosen distribution |
| Available memory | 1 GB minimum | As per the minimum requirements of the chosen distribution |
| Available disk space | 1.5 GB available hard disk space, includes 1 GB for Microsoft .NET Framework | 100 MB |
| Display | Minimum of 1024 x 768, 96 or 120 DPI | No display required |
| Temperature range | Check upon environment requirement. It might not allow to go as high as ADC card allows. | |

1. Contact support@acqiris.com for a list of recommended host computers.

Quality

Samples of this product have been type tested and verified to be robust against the environmental stresses of Storage, Transportation and End-use; those stresses include but are not limited to temperature, humidity, shock, vibration, altitude and power line conditions.

| Environmental and physical | | |
|--------------------------------|----------------------------|---|
| Usage | | Indoor use recommended (outdoor is possible provided the ADC card is within an environment that guarantee indoor conditions) |
| Pollution degree | | 2 |
| Temperature range | Operating ^{1,2} | 0 to +50 °C (sea-level to 10,000 feet) |
| | | 0 to +45 °C (10,000 to 15,000 feet) |
| | Non-operating | -40 to +70 °C |
| Altitude | | Up to 15,000 feet (4 572 meters) |
| Relative humidity range | Operating ³ | 10 % to 90 % RH, non-condensing |
| | Non-operating ³ | 5 % to 95 % RH, non-condensing |
| Electro-magnetic compliance | | Complies with European EMC Directive 2014/30/EU EN 61326-1:2013 (industrial) EN 55011:2016 Group 1, Class A And with international standards : IEC 61326-1:2012 CISPR 11:2015 / AMD1:2016 USA: CFR 47 Part 15, Subpart B, Class A Australia/New Zealand: AS/NZS CISPR 11:2011 Canada: ICES/NMB-001:2006 |
| Safety | | The product was tested and found to be in conformity with: IEC 61010-1:2010 IEC 61010-1:2010 / AMD1:2016 And National differences: - EU Group Differences - EU Special National Conditions - EU A-Deviations - AU, CA, KR, US Complies with European LVD Directive 2014/35/EU EN 61010-1:2010 |
| Environmental | | Directive 2015/863/EU (RoHS 3) EN 50581 :2012 |
| Acoustic | | Acoustic noise emission LpA < 60 dB (<i>nominal</i>) Operator position, Normal operation mode |
| Power dissipation ⁴ | | |
| + 3.3 V /+ 12 V | | Power on PCIe edge connector < 15 W (<i>nominal</i>) |
| + 12 V | | Power on additional power cable ⁵ < 35 W (<i>nominal, firmware dependent</i>) |
| Mechanical characteristics | | |
| Form factor | | PCIe x8 standard |
| Size | Without fan ⁶ | 17.6 W x 126.3 H x 169.5 D mm |
| | With rear fan ⁷ | 40.6 W x 126.3 H x 244.1 D mm |
| Weight | | < 1.24 kg (< 2.73 lbs) |

1. Host computer internal ambient temperature at intake of the digitizer's fan.
2. Tested in accordance with IEC 60068-2-1 and IEC 60068-2-2.
3. Tested in accordance with IEC 60068-2-30 and IEC 60068-2-78.
4. Power measured in digitizer mode.
5. Additional power cable mandatory to ensure adequate power distribution as per PCIe standard.
6. 60 m³/h airflow is required. The unit must be operated with the included fan.
7. Optional card retainer can be ordered to stabilize the PCIe card in the host computer.



Configuration and ordering information

Ordering information

| Model | Description |
|--|---|
| SA230P | PCIe 14-bit ADC card with FPGA signal processing includes: <ul style="list-style-type: none">– Fan assembled on module– 5-year standard warranty– Power cable |
| Configurable options | |
| Additional Memory | |
| Full scale range version: 500 mV / 2.5 V (standard voltage range) or 500 mV / 1 V (low voltage range) - Planned for Q2'2019. | |
| Firmware and application options | |
| Card retainer (recommended if the card is assembled horizontally or in harsh environment) | |



Ordering number format is SA230P-xxxx.

Accessories

| Model | Description |
|------------|----------------------------------|
| U5300A-101 | MMCX male to SMA male cable, 1 m |
| U5300A-102 | MMCX male to BNC male cable, 1 m |
| U5300A-001 | Card Retainer |
| U5300A-003 | Short card retainer |

This information is subject to change without notice.

Published in Switzerland,
May 2019

Contacts



Headquarters

Acqiris SA
Chemin des Aulx 12
1228 Plan-les-Ouates / Geneva
Switzerland
+41 22 884 32 90

Acqiris Americas
contact-americas@acqiris.com

Acqiris Asia-Pacific
contact-asia-pacific@acqiris.com

Acqiris Europe
contact-emea@acqiris.com

Acqiris Japan
contact-japan@acqiris.com

Support
support@acqiris.com